

**J PRISMA**  
P A R M A I T A L Y



checkweigher  
**2CW51**





discover all the details on our web-site!



## Technical Specifications

Weighing range	up to 1500 g
Display division	from 1 g
Linear speed	up to 40 m/min
Throughput	up to 80 ppm
Accuracy*	from $\pm 1$ g
Pneumatic supply	0,6 Mpa
Air consumption (for ejection)	1 NL
Power supply	230V 50/60Hz single phase
Power consumption	700 W
Mirror finishing of metal parts	Stainless Steel IP54
Climatic environment	from 5°C up to +40°C non-condensing (closed)

\*depending on the weight, dimensions and type of product

## Electronics

### D3




- Digital electronics with alphanumerical graphic display
- 100 storable product programs

## Equipment


- Electronic self-calibration device
- Mobile average function
- Conformity with standards ISO - FDA - HACCP - GMP - CE
- 2 RS232 serial ports
- 3 levels password access protection
- Production data management in conformity with the standards in force

## Optional

- Ejection systems
- Reject management systems
- Wind-prevention tunnel
- 24-columns panel printer
- Alarms notification
- USB interface
- Ethernet interface for Industry 4.0 compliance
- Products programs memory expansion
- Feed-back function
- FAT/SAT, IQ/OQ validations
- MID Certification



RUNNING DIRECTION TO CLIENT'S SPECS

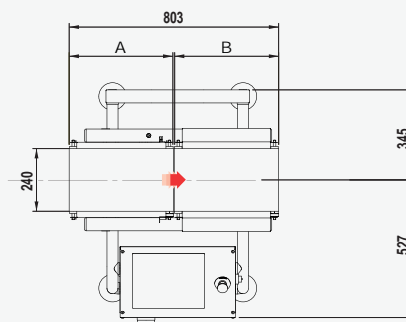

Plates configuration	
Infeed	Weighing
A	B
400	400
500	300
300	500



The manufacturer reserves the right to change the product specifications without notice. The image and the drawing are indicative of one of the possible configurations of the machine.