

**J PRISMA**  
P A R M A I T A L Y



**checkweigher**  
**5CW51 / 6CW51**





discover  
all the details  
on our web-site!



## Technical Specifications

Weighing range	up to 60000 g
Display division	from 5 g
Linear speed	up to 50 m/min
Throughput	up to 60 ppm
Pneumatic supply	0,6 Mpa
Air consumption (for ejection)	1 NI
Power supply	380V three phase 50/60Hz with ground and neutral
Power consumption	1000 W
Mirror finishing of metal parts	Stainless Steel IP54
Climatic environment	from 5°C up to +40°C non-condensing (closed)

## Electronics

### D3





- Digital electronics with alphanumerical graphic display
- 100 storable product programs

## Equipment

- Electronic self-calibration device
- Mobile average function
- Conformity with standards ISO - FDA - HACCP - GMP - CE
- 2 RS232 C serial ports
- 3 levels password access protection
- Production data management in conformity with the standards in force

## Optional

- Ejection systems
- Alarms notification
- Reject management systems
- USB interface
- Wind-prevention tunnel
- Ethernet interface for Industry 4.0 compliance
- 24-columns panel printer
- Products programs memory expansion
- 24-columns panel printer
- Feed-back function
- Special conveyor
- FAT/SAT, IQ/OQ validations

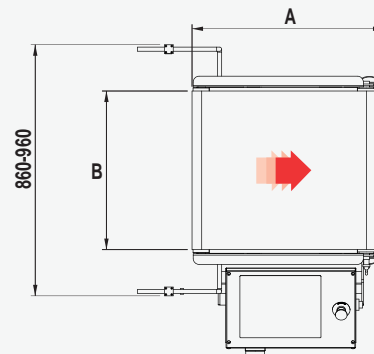

Plates configuration	
Weighing	
A	B
650	540
800	640



The manufacturer reserves the right to change the product specifications without notice. The image and the drawing are indicative of one of the possible configurations of the machine.